



TORLYS Peace Of Mind Rating

TORLYS EverTile Premier

ULTIMATE FLOORING

Beautiful. Durable. Waterproof floors.



BUILT TOUGH.

TORLYS
smart floors

*Starts Beautiful.
Stays Beautiful.*

With EverTile Premier, the beautiful floor you see now is exactly what you will enjoy for years to come. For the home it is elegant and contemporary, with remarkably long-life durability that will accommodate even the high-traffic needs of commercial spaces like hotels or restaurants. EverTile Premier is the ultimate in fashion and performance.

www.torlys.com/builder



TORLYS Peace Of Mind Rating

TORLYS EverTile Premier

Beautiful. Stylish. Warm.

Vive la difference! EverTile is a floor that “has it all” – the striking on-trend appearance of large-area ceramic tiles is achieved with uniquely designed warmth and durability.

Experience the Ultimate: EverTile Premier flooring.

5/16" (thickness) x 11-1/2" (width) x 23-5/8" (length) (nominal) | 8.3mm (thickness) x 292mm (width) x 601mm (length)

The Look


The alluring beauty of low-gloss ceramic and slate without the coldness. Clean lines, modern styles are perfect for any space in a home or commercial property.

The Feel

Warm, warm, warm. Quiet and comfortable. A beautiful, refreshing change for any room, especially kitchens and bathrooms!

The Details

4-sided bevels. CorkPlus™ attached cork underlay with Microban® antimicrobial protection.

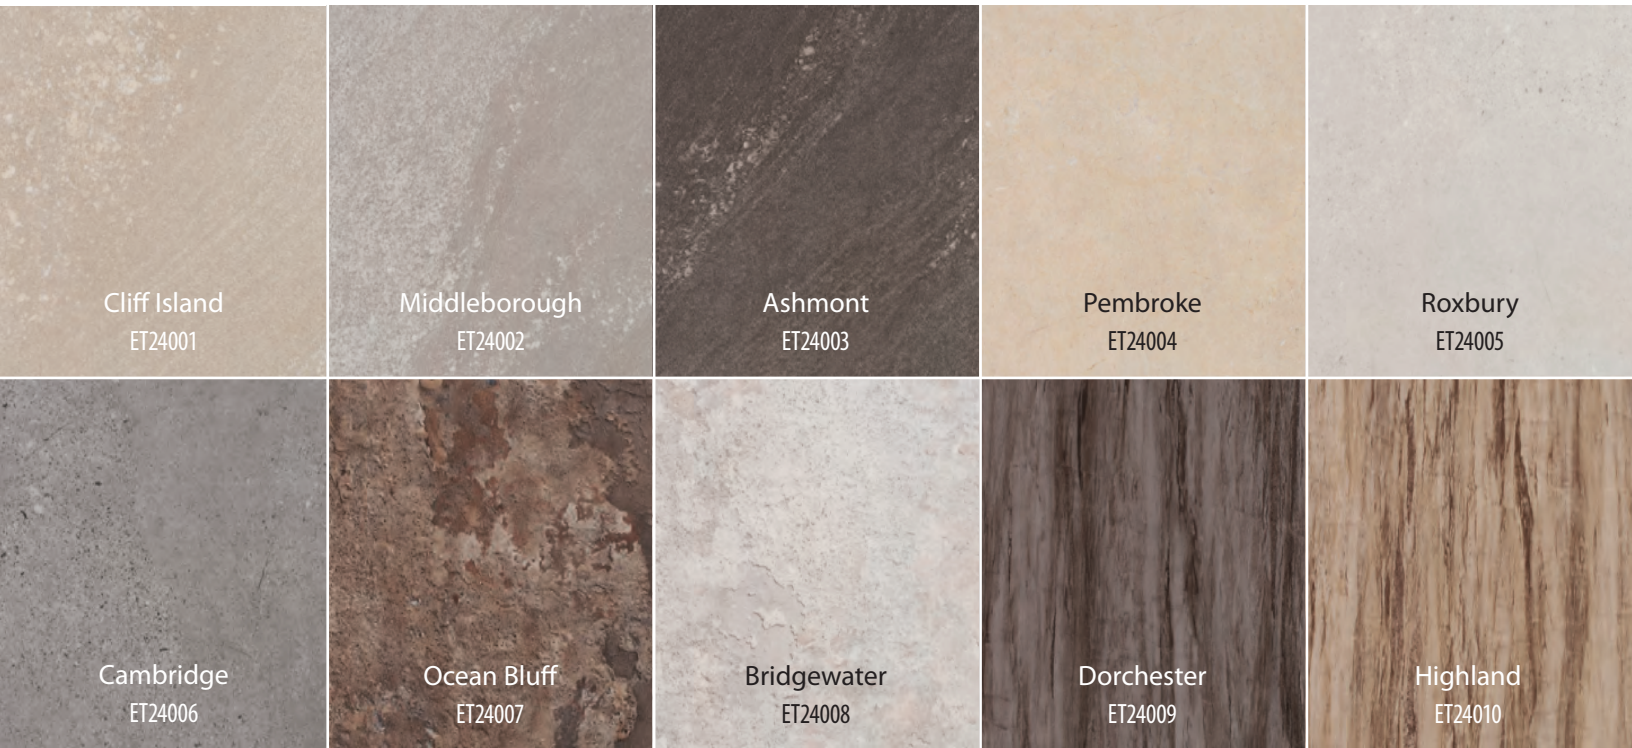

Waterproof

Top layer and core are both impervious to water to prevent water damage.



Durable

Ultra-thick 0.5mm wear layer is designed to handle commercial environments.



Dent Resistant

High-density core and top layer provide “stays beautiful” assurance for years.



Warm

Warm to the touch with CorkPlus™ attached cork underlay with Microban® antimicrobial protection.



Quiet


The room in which the floor is installed as well as the one below remain quiet thanks to noise-dampening CorkPlus™ attached underlay.



Easy to Maintain

Spills and messes are easily wiped up with a damp mop. Highly stain resistant.

TORLYS Comparative Sound Transmission – Field Testing

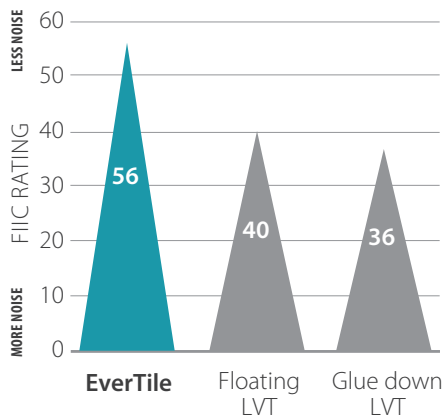

Flawless Stairs & Mouldings

TORLYS EverWood & EverTile Flush Stair Nosing and Flush Reducer are made from the exact same top layer as EverWood & EverTile. These mouldings were specially designed to work with EverWood & EverTile. They do not overlap, are installed flush with the flooring, and in the case of the Flush Stair Nosing, the flooring is clicked onto it for a flawless look without transition bumps.



How it's made. **Ultra-Stable. Dent Resistant. Waterproof.**

1 Top Layer

- Ultra-thick .5mm (20 mils) wear layer for ultimate wear resistance
- Protected with TORLYS scratch resistant coating
- Superior cleanability and stain resistance
- Warranted for 25 years of residential and 10 years of commercial use

2 Decorative Layer

- Beautiful and authentic looks
- Deep rich textures
- Fade resistant

3 TORLYS Ultra-Stable Smart Core


- More than twice as thick as the industry standard
- No telegraphing of minor subfloor imperfections
- 100% waterproof
- Ultra-stable for gap and peak free performance
- High density for the ultimate in dent resistance
- No need for unsightly expansion strips in most residential applications

4 TORLYS Uniclic® Joint

- Exclusively engineered for demanding commercial applications
- Gap free installations
- Easy repairs with the TORLYS Bulldog Easy Plank Replacer™

5 TORLYS CorkPlus™ Underlay

- Quiet underfoot as well as in the room below
- Built-in for cost and time effective premium installations
- Microban® antimicrobial protection protects against mould and mildew

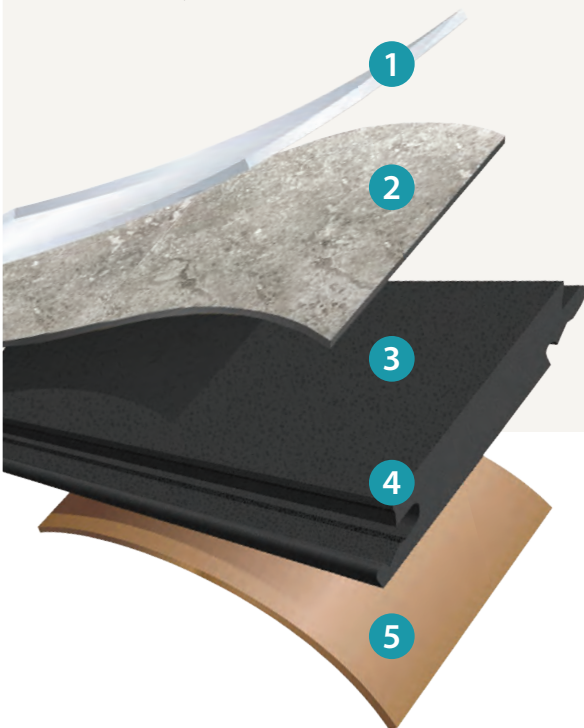

Proven to exceed industry standards.

TORLYS EverTile Premier Warranty

TORLYS EverTile Premier floors are covered by a 25-Year, Wear, Stain and Water Warranty, and a Lifetime Structural and Joint Integrity/No Gapping Warranty for residential use. A 10-Year Wear, Structural and Joint Integrity/No Gapping Warranty applies to approved commercial applications. See www.torlys.com/builder for details.

Confidence underfoot with TORLYS CorkPlus™ Underlay.

When we tested the TORLYS CorkPlus™ attached underlay and an untreated cork underlay against bacteria, mould and mildew, the CorkPlus™ Underlay with Microban® antimicrobial protection inhibits the growth of bacteria, mould and mildew and nasty odours.



LEED® TORLYS Smart Floors can assist in acquiring LEED® certification for most building projects. Please visit <http://www.torlys.com/builder/leed/leed-guide/>



TORLYS is a member of the Canada Green Building Council whose mission is to lead and accelerate the transformation to high-performing, healthy green buildings, homes and communities throughout Canada.

Exceeds performance across all standard tests.

When researching your preferred flooring, compare TORLYS EverTile Premier to those in similar categories.

| Standard | Test Reference | Result |
|-------------------------|----------------|---------------------------------------|
| Residual Indentation | ASTM F1914-07 | Pass |
| Coefficient of Friction | ASTM C 1028 | Static Coefficient of Friction = 0.65 |
| Slip Resistance | ASTM D2394 | Static 0.62 Dynamic 0.68 |
| Chemical Resistance | ASTM F925-08 | Pass |
| Critical Radiant Flux | ASTM E648 | Class 1 |
| Flammability | ASTM E 84 | Class C |
| Light Stability | ISO 105 - B02 | Grade >6 |

Uniclic® joint technology – for remarkably stable, gap resistant floors

Both side and end joints utilize Uniclic® joint technology. The patented Uniclic® system was exclusively engineered for EverTile Premier and is the only floor backed by a gap warranty.



Healthy Home – FloorScore® certified

EverTile meets the strict indoor air quality (IAQ) requirements of FloorScore®, and also meets the requirements of the State of California Department of Health Services Standard Practice (aka Section 01350) for Indoor Air Quality.



Use TORLYS Smart Tape for Added Convenience.

Installations against a brick wall, fireplace hearth or a curved surface like a staircase can be an issue with other floating floors because they may shift and move. Make installation easier by using TORLYS Smart Tape to anchor the first rows of planks in place and stop any movement. Please check complete installation instructions for details.

No worries about sub-floor imperfections.

Subfloor imperfections are less of an issue with EverTile Premier.

Most LVT/vinyl floors are thin (5mm, 4mm, 1/8" or even less) and many of them need to be glued down. They require an almost perfect subfloor preparation, otherwise they will telegraph every imperfection. TORLYS EverTile Premier is 5/16" (8.3mm) thick, has a built-in CorkPlus™ attached cork underlay resulting in a very forgiving floor for small subfloor imperfections!